



Quick Start Guide

PM560






Device Parts

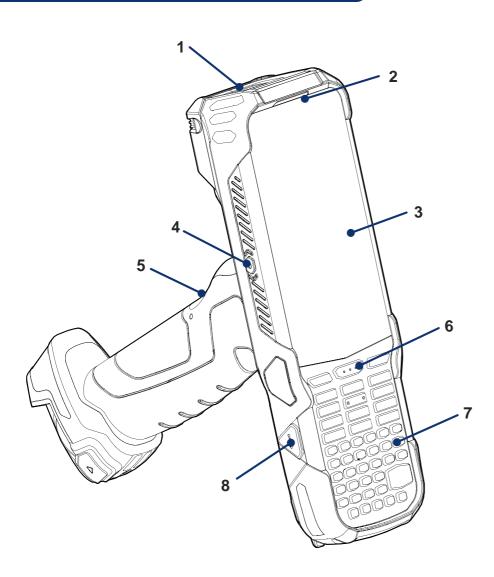

- 1. Scanner
- 2. Front LED indicators
- 3. Touch screen
- 4. Power button
- 5. Scan button (Gun handle)
- 6. Scan button (Front)
- 7. Keypad (Numeric / Alpha-Numeric)
- 8. USB connector

Device Parts

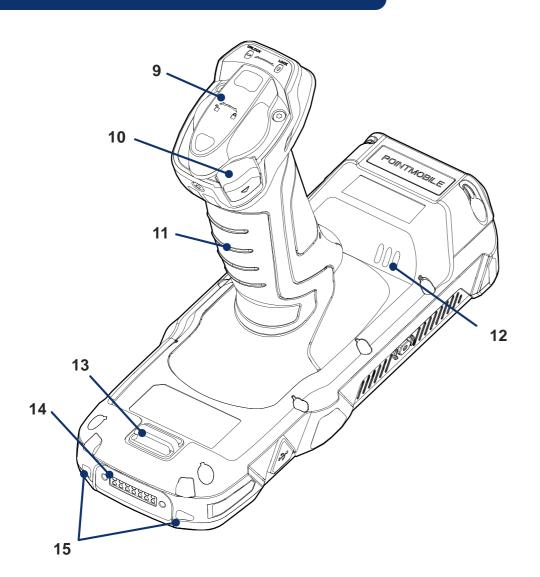

- 9. Battery
- 10. Battery release button
- 11. Gun handle
- 12. Speaker
- 13. Hand strap hole
- 14. I/O connector
- 15. Bottom LED indicators

Product Standard Accessories



Battery pack



5V 2A power adapter



AC Plug



USB type C cable



Hand strap




LCD protection film

Battery Replacement


Insert Battery

- 1. Insert the battery into the gun handle with the battery end aligned horizontally.
- 2. Turn the battery clockwise until the battery release button is fully raised.



Remove Battery

- 1. While pressing the battery release button, turn the battery counterclockwise.
- 2. Pull out the battery.



Turning on / off



Turn on


Press and hold the power button on the left side of the PM560 until **SMART BEYOND RUGGED** logo displays on the screen.

Turn off

When the display is on, press and hold the power button until the power menu is shown.


Then, tap Power off.

LED Indicator

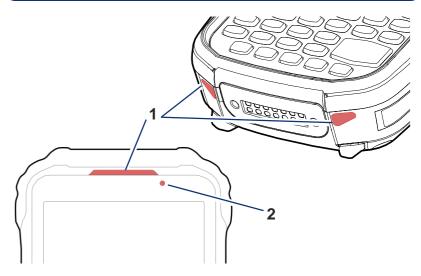

No	Indicator	Status	Indication	
1	Notification LED	Solid red	Device entered hot swap mode	
		Blinking blue	Notification existing	
		Red flash	Barcode reading failed	
		Blue flash	Barcode reading success	
2	Power LED	Solid green	Device is fully charged	
		Solid red	Charging the device / Battery is low	
		Blinking red	Charging temperature is out of normal range / Battery is very low	
		Alternately blinking red & green	Cannot recognize the battery	

Charging the Device



- 1. Open the USB connector cap using the hole on the cap.
- 2. Assemble the AC plug, power adapter and USB cable.
- 3. Connect the cable to the USB connector of PM560.
- 4. Provide power by plugging the power adapter to the wall socket.

PM560 can also be charged with charging cradle (sold separately).

< Caution >

- Always use an original power supply from Point Mobile. Other chargers and cables may damage the PM560.
 The device warranty does not cover any damage caused by the usage of non-original power supplies.
- 2. Make sure the charger and cable is not wet.

Keypad

Alpha-Numeric Keypad



Numeric Keypad



Function		Key Combination	
		Alpha-Numeric	Numeric
四))	Volume up	Fn + A	Fn + 1
d)	Volume down	Fn + G	Fn + 4
⊕ ▲	Display brightness up	Fn + F	Fn + 3
♦ ▼	Display brightness down	Fn + L	Fn + 6

Using Keyboard Backlight


Use keyboard backlight when the keypad is not visible in the dark place.

Go to Settings (> Display ()






Turn the Keyboard Backlight switch on.

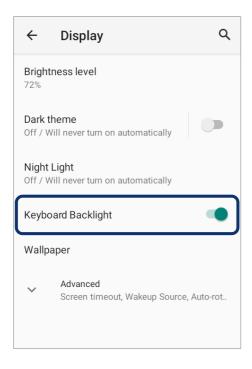

Scan a Barcode

Scanner is disabled by default, so enable the scanner from ScanSettings first.

Check if the scanner icon is placed on the Status bar. Then, press a scan button on the device to scan a barcode.



Center the cross-hair aimer over the barcode. You can tilt the aimer slightly for a comfortable angle to scan.





N6803 Scanner SKU